



**SILENCER
CENTRAL®**

BANISH 45



BANISH™ Suppressors are the original multi-caliber suppressor and have been setting the standard for modular suppressor design since 2009. As “the one that fits any gun,” BANISH Suppressors are more than just a multi-caliber suppressor, they are also packed full of innovative design features that BANISH both sound and recoil.

BANISH Suppressors has always had one overriding goal in mind - to make the most user-friendly suppressor on the market. And what is more user-friendly than being multi-caliber and user-serviceable? At BANISH Suppressors, we are proud of what we've accomplished, and we want to share with you what makes a BANISH Suppressor stand out from the crowd.

Our unique WhisperTech™ tube is where the BANISH multi-caliber system starts, with a lightweight titanium alloy tube. BANISH Suppressors are light-weight and tough enough for a lifetime of service. The internal baffles handle the gas in such a way that the suppressor significantly reduces recoil as well as sound. Cleaning your can isn't a problem with our CanClean™ technology, making this one of the fastest cleaning suppressors on the market.

WARNING

To provide for your safety and the effective use of this silencer, it is important that the owner and any user of the silencer read this entire manual and strictly follow the warnings and instructions within. This silencer should be used only by those who are well-versed in the safe operation of firearms.

Failure to follow installation and maintenance instructions in this manual may result in serious personal injury and damage to the firearm.

Suppressed firearms make less noise than unsuppressed firearms and it is easy to forget that they are still capable of causing bodily injury and property damage. Remember, a suppressed firearm should be treated with the same safety and caution as an unsuppressed firearm.

Before installing the silencer, be sure that the firearm is unloaded and the action is opened and visibly clear of any ammunition. If you are at all unsure as to the proper procedures to ensure that your firearm is unloaded, please consult your firearm user's manual/instructions and/or contact a properly licensed dealer or the manufacturer of your firearm.

Firearm silencers are user-attached firearm muzzle devices, and as such are subject to improper attachment issues unless the procedures outlined in this manual are followed precisely.

Check the fit between your barrel and silencer before firing! The thread mount must be fully shouldered on the barrel. There should be no visible gap between the barrel shoulder and the face of the silencer thread mount (*crush washer from muzzle brake must be removed*).

If there is any gap DO NOT fire the host with the silencer attached. Poor accuracy and product damage may result if the silencer is not seated against thread shoulder.

Silencers must be free of obstructions such as mud, dirt, etc. DO NOT attempt to shoot through an obstructed silencer.

The silencer is designed to suppress the initial muzzle blast and subsequent projectile de-corking pressure. The silencer doesn't contact or otherwise interact with the bullet, allowing the projectile to travel at its default speed.

A sonic crack may be produced by the projectile as it breaks the sound barrier. This is solely a function of the projectile breaking the sound barrier and is not related to product performance.

To ensure your silencer remains secure while firing, it is of the utmost importance that you frequently verify the silencer is securely tightened onto the barrel. We recommend checking the security of the attachment after 30 discharges of the firearm.

Before removing the silencer from the host firearm, be sure that the firearm is unloaded and the action is opened so that it is visibly clear of any ammunition. When removing the silencer, use extreme caution as it may be hot to the touch after firing. Use a Devour™ suppressor cover (sold separately) or gloves to avoid burns or other injuries.

Once the silencer is removed from the host firearm, BANISH recommends using a thread protector or other muzzle device to protect the muzzle threads and crown during storage or transport.

CALIBERS & RESTRICTIONS

.45 ACP
.40 S & W
10 mm
9 mm
.380 ACP
.22 LR
Rimfire
300 BLK (subsonic only)

Full auto rated

User-serviceable

DIAMETER

1-3/8"

WEIGHT

9.6 oz (compact)
11 oz (extended)

LENGTH

6.7" (compact)
8.6" (extended)

BAFFLES

8 (compact)
12 (extended)

MATERIALS

Titanium, Aluminum,
& Stainless Steel

PISTON OPTIONS

.578x28
1/2x28
5/8x24
9/16x24
M13.5x1 LH
M14.5x1 LH
M16x1 LH
M16x1 RH



45

The BANISH 45 was specifically designed for handguns and will fit calibers from .45 ACP to rimfire. Testing shows that the BANISH 45 is able to suppress a 9mm pistol an amazing 36 decibels, far more sound reduction than the competition.

The BANISH 45 is the lightest in its class at a mere 9.6 ounces in the compact configuration. Ideal for 3-gun or target shooting, the BANISH 45 will help protect the hearing of the shooter and others in a shooting competition and reduce recoil for quicker second shot target acquisition.

The BANISH 45 comes as a 8.6" suppressor holding 12 STifle™ baffles, yet for tighter shooting platforms can easily break down and assemble into a 6.7" configuration with only eight baffles.

Perfect for the range, and also a plus for competition and home defense, the Banish 45 will significantly reduce the report and recoil of your handgun.

This multi-caliber, user serviceable and modular design makes it the one to fit any handgun.

BANISH™
45



INSTALLATION OF SUPPRESSOR

Always ensure the firearm is unloaded when attaching or removing suppressor. After confirming that your firearm is unloaded, place the threaded end of the BANISH 45 in line with the threads of the barrel.

Ensure the threads on the barrel and suppressor are clean and undamaged, screw the suppressor onto the barrel threads until the suppressor firmly seats against shoulder.


Take special care to avoid cross-threading as damage to the suppressor and barrel threads will result, as well as misalignment of the suppressor with the bore of the firearm.

This may result in a potential baffle strike that could cause serious personal injury and damage to both the firearm and suppressor. Since direct thread mounted suppressors can loosen or unscrew during firing, **it is extremely important that the operator frequently checks that the silencer remains securely threaded to the barrel.**

Please note, the suppressor will be very hot during and after firing. Wait until the suppressor cools or use a heat resistant fabric to retighten.

Hand tighten only. Ready for use.

ITEM NO.	PART NO.	QTY.
A	END CAP	1
B	BAFFLE - BLUE	2
C	BAFFLE - RED	2
D	BAFFLE - BLACK	8
E	EXTENSION TUBE	1
F	O-RING H70-025	1
G	MAIN TUBE	1
H	PISTON HOUSING	1
I	.578 PISTON	1
J	BUFFER SPRING	1
K	O-RING H70-018	1
L	PISTON CAP	1
M	WAVE SPRING	1
N	FIXED BARREL SPACER	1

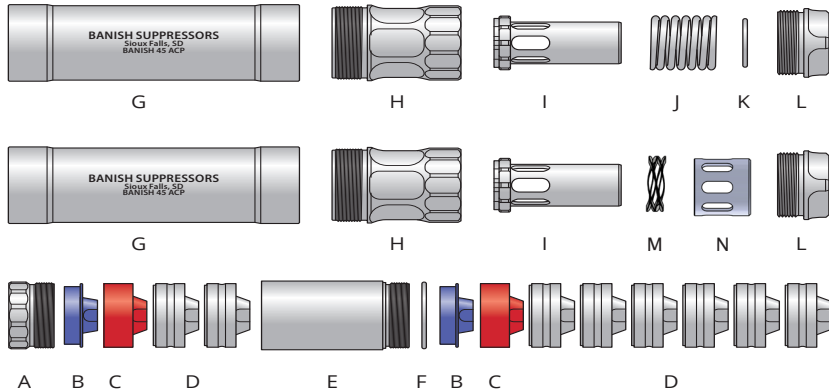

*Note: Don't remove O-Rings, part listed for replacement needs only.

DISASSEMBLY AND CLEANING

It is recommended that the suppressor be cleaned every 250 - 500 rounds fired, more often (every 100) with rimfire ammunition.

To disassemble make sure the firearm is unloaded and remove from host firearm.

Unscrew piston cap (L) and remove piston (I) and spring (J).

Unscrew end cap (A), piston housing (H), and extension tube (E) from the main tube (G). Note: Blue baffles are installed into the extension tube and end cap prior to assembly.

When using the Banish 45 on firearms with a fixed barrel (not slide action pistols), a fixed barrel spacer (N) should be

used in place of the spring. Remove the existing spring that is placed over the piston (J). Install the wave spring (M) and fixed barrel spacer (N) as shown over the piston. Secure the assembly by installing the piston cap.

Using your solvent of choice, spray the inside of both tubes and let soak before removing baffles.


Place the tubes on a soft wood block and tap baffles out of the main tube (G) and the extension tube (E) using a wooden dowel and small hammer.

Use a stiff bristle brush (brass or nylon) with solvent / carbon killer of choice to clean the baffles and inside the tube.

Make sure all parts are clean and solvent has been removed.

BANISH 45

ITEM NO.	PART NO.	QTY.
A	END CAP	1
B	BAFFLE - BLUE	2
C	BAFFLE - RED	2
D	BAFFLE - BLACK	8
E	EXTENSION TUBE	1
F	O-RING H70-025	1
G	MAIN TUBE	1
H	PISTON HOUSING	1
I	.578 PISTON	1
J	BUFFER SPRING	1
K	O-RING H70-018	1
L	PISTON CAP	1

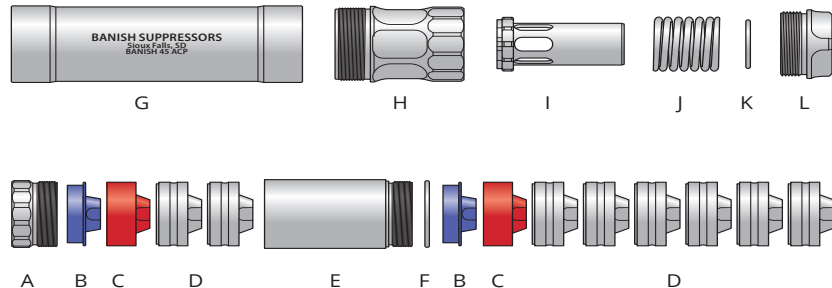

*Note: Don't remove O-Rings, part listed for replacement needs only.

45

ASSEMBLY - Full Length

Place the spring (J) over the piston (I) and slide into the piston housing (H), ensure the end of the piston fits in the gear shaft. Then attach the piston cap (L). Apply anti-seize to interior threads of the main tube.

Hold the main tube (G) with the engraved text as you would read it (not upside down) and thread the piston assembly into the main tube (G). The piston assembly will be on the right side as shown in the diagram on the opposite side of this page.

Using a flat surface, stack six black baffles on top of one red baffle. Each of the black baffles (D) and red baffles (C) have exterior witness lines and small alignment features machined into the end of the baffle to maintain exhaust port alignment.

Ensure each baffle is lined up and the index tabs are engaged.

Place the main tube (G) with attached piston assembly over the baffle stack, slide the tube to the edge of a surface and flip it to the other end (use your finger to hold the baffles in place).

Thread the extension tube (E) into the assembled main tube. Note: The blue baffle (B) should be installed into the extension tube (E) prior to assembly onto main tube.

Stack two black baffles (D) on top of one red baffle (C). Place the assembled tube over the baffle stack, slide the tube to the edge of a surface and flip it to the other end (use your finger to hold the baffles in place) and attach the end cap. Note: The blue baffle (B) should be installed into the extension tube (E) prior to assembly onto main tube.


Hand tighten. Ready for use.

BANISH 45


ITEM NO.	PART NO.	QTY.
A	END CAP	1
B	BAFFLE - BLUE*	2
C	BAFFLE - RED*	2
D	BAFFLE - BLACK*	8
E	EXTENSION TUBE*	1
F	O-RING H70-025*	1
G	MAIN TUBE	1
H	PISTON HOUSING	1
I	.578 PISTON	1
J	BUFFER SPRING	1
K	O-RING H70-018*	1
L	PISTON CAP	1



G



H



I



J



K



L

*Note: the extension tube with the blue baffle, one red baffle, and two black baffles are not used in the compact setup.



A

B

C

D

*Note: Don't remove o-rings, part listed for replacement needs only.



ASSEMBLY - Compact

From full length assembly, simply remove the end cap (A) and extension tube (E) from the main tube and reattach the end cap directly to the main tube.

To assemble from take-down - Place the spring (J) over the piston (I) and slide into the piston housing (H), ensure the end of the piston fits in the gear shaft. Then reattach the piston cap (L). Apply anti-seize to interior threads of the main tube.

Hold the main tube (G) with the engraved text as you would read it (not upside down) and thread the piston assembly into the main tube (G). The piston assembly will be on the right side as shown in the diagram on the opposite side of this page.

Using a flat surface, stack six black baffles on top of one red baffle. Each of the black baffles (D) and red baffles (C) have exterior witness lines and small alignment features machined into the end of the baffle to maintain exhaust port alignment.

Ensure each baffle is lined up and the index tabs are engaged.

Place the main tube (G) with attached piston assembly over the baffle stack, slide the tube to the edge of a surface and flip it to the other end (use your finger to hold the baffles in place).

Attach the end cap. Note: One blue baffle (B) is in the end cap (A).

Hand tighten. Ready for use.

GUARANTEE, WARRANTY, AND CANCELLATION POLICY

YOUR SILENCER DONE RIGHT, GUARANTEED

We make getting a silencer simple—and we commit to doing it right, every time.

We guide you through every step, with expert advice from real people. We commit to responding to your questions and concerns within 2 business days.

We leave no detail overlooked. We commit to completing your paperwork right, the first time. If you provide accurate information and Silencer Central makes an error on your application that results in a disapproval from the ATF, we will refund the cost of your tax stamp and work quickly to get you resubmitted.

We engineer our BANISH® Suppressors to the highest levels of quality, reliability, and performance. BANISH Suppressors ship with a warranty against defects in manufacturing, but we also guarantee satisfaction and performance. If your BANISH Suppressor does not significantly reduce the report and recoil of your firearm, we'll buy it back.

We ship with care. Our silencers are carefully packaged surrounded in durable foam and encased in a hard-sided box to prevent any damage from occurring during transit. When shipping your barrel(s) for gunsmithing services, we commit to repairing or replacing any firearm damaged in transit, so long as all shipping specifications have been met. When it comes to delivery, if your silencer is lost or stolen, we will cover the cost and work quickly to get you resubmitted.

NFA ITEM CANCELLATION POLICY

If for any reason you change your mind after purchasing and wish to cancel your order, you will receive your full cost of purchase back, including your tax stamp, less a 25 percent processing fee which will be issued in the form of a credit to be applied to a future purchase, which credit must be redeemed within one calendar year of cancellation. Cancellation must be within 30 days of purchase and before any ATF paperwork has been submitted for the item. Unfortunately, once application forms have been submitted to the ATF, we are unable to cancel your order. Purchase of all sale items is final and no cancellation or refund will be issued.

RETURN POLICY FOR NON-NFA ITEMS

Silencer Central will accept returns for all accessory items within 30 days of your purchase, provided the accessories are unused and received in the original packaging. Returns are honored in the form of credit toward a future purchase with Silencer Central or replacement product for defective or damaged items. Credits must be redeemed within one year of the return or are subject to forfeiture. Note: customers are responsible for any incurred shipping fees on returns.

GUARANTEE, WARRANTY, AND CANCELLATION POLICY

BANISH SUPPRESSOR GUARANTEE

If your BANISH® Suppressor doesn't significantly reduce the report of your firearm, as well as recoil, we'll buy it back within 30 days. If performance concerns are noted, you can send your BANISH Suppressor back to be reviewed on a case-by-case basis. We will field test your BANISH Suppressor and provide documentation of actual noise reduction and/or recoil results to satisfy our commitment to performance satisfaction. Additionally, we guarantee the quality and craftsmanship of your BANISH Suppressor. After you are approved and you receive your BANISH Suppressor, you may return your BANISH Suppressor to Silencer Central for a full refund in the form of a Silencer Central gift certificate (tax stamp not included). All returns must be within 30 days of confirmed delivery.

The following terms and conditions apply:

- This offer only applies subsequent to the Form 4 being approved by the ATF. BANISH® Suppressor orders cannot be canceled or refunded while the Form 4 is pending.
- Tax stamp payments will not be refunded.
- The value of any promotional items earned as part of the original purchase (e.g., free accessories, etc.) will be deducted from the refunded amount.
- To process a return, you must first contact Silencer Central to receive a return authorization number and begin the Form 4 submission process to transfer back. At that time, you will receive instructions on how and when to return the BANISH® Suppressor. Following these instructions is required.
- ATF approval is required before the BANISH Suppressor can be returned to Silencer Central. Silencer Central is not responsible for any delays caused by the ATF.
- The refund will be given once Silencer Central receives said

BANISH Suppressor back into our NFA inventory.

- To receive a full refund, all respective accessories, cases, manuals, and original packaging must accompany your returned BANISH Suppressor. Your original approved Form 4 is also required
- All refunds will be in the form of a Silencer Central Gift Certificate, which is not redeemable for cash.
- Please Note: Silencer Central reserves the right to modify this guarantee at any time without notice. Moreover, Silencer Central reserves the right to refuse specific cases deemed fraudulent. Thank you for your business.

WARRANTY REPAIR

For warranty claims on BANISH Suppressors, please print and fill out the warranty repair request form.

Please contact our Customer Service Department at 888-781-8778 for further details and Requirements or visit silencercentral.com.



**SILENCER
CENTRAL®**

SilencerCentral.com